SpotOn®

Floor 200

SLIP-CERTIFIED WITHOUT LAMINATION

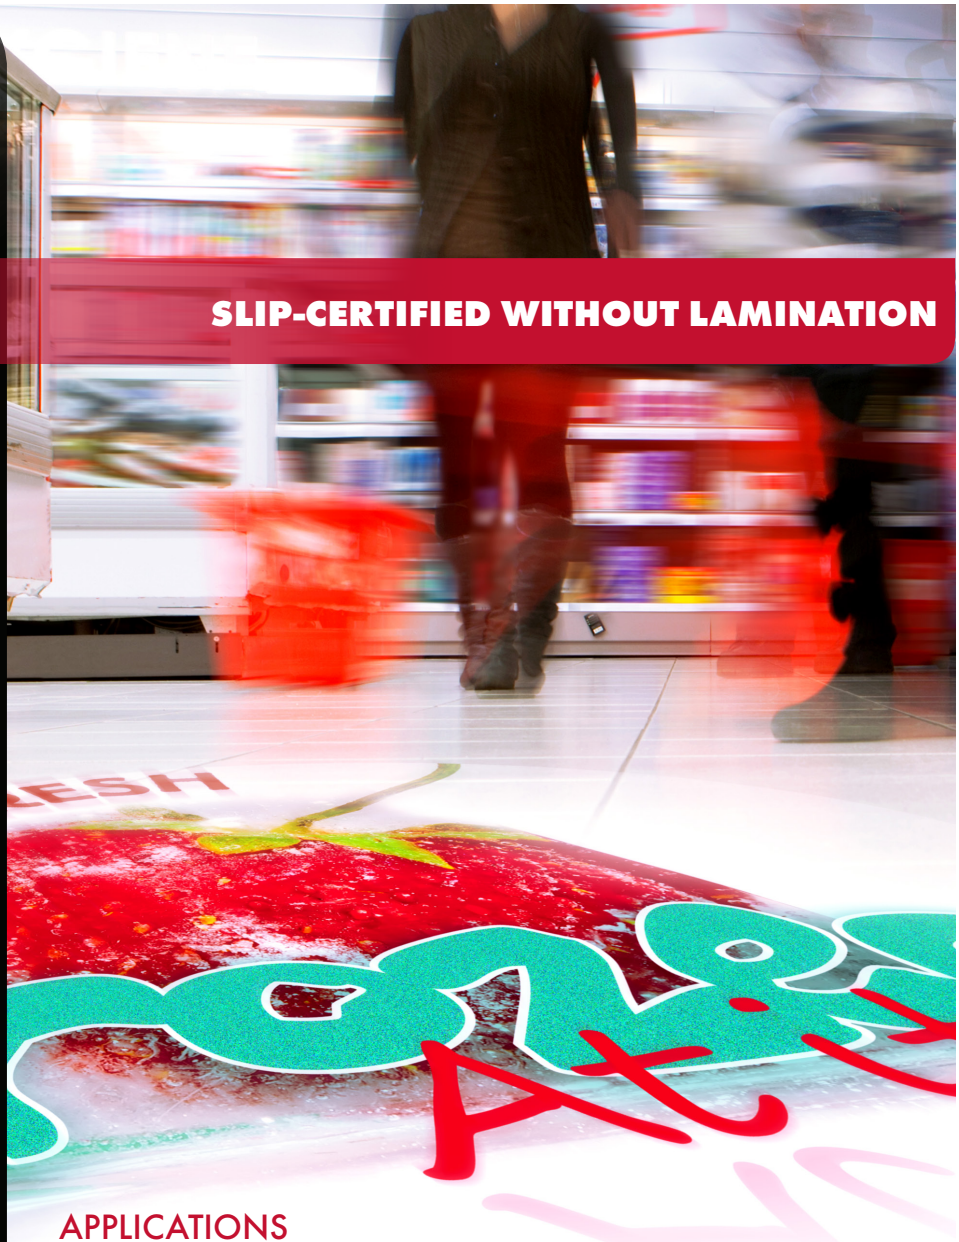

SpotOn® Floor 200 is a print media for short-term, indoor floor graphics without the need for lamination. It boasts a post-printed R-10 anti-slip rating, which allows for vibrant, slip-resistant floor graphics. SpotOn® Floor 200 has been specifically developed for a simple, easy and tool-free installation. Thanks to a unique dot-pattern printed pressure-sensitive polyacrylate adhesive, this film can be applied to multiple flooring surfaces including short pile carpets, floor or ceramic tiles, sealed wood, concrete, waxed vinyl, marble, terrazzo surfaces and more. It can also be cleanly and quickly removed within six months of application.

- IDEAL FOR SHORT TERM INDOOR FLOOR APPLICATIONS
- EASY TOOL FREE APPLICATION
- CAN BE REMOVED EASILY WITHIN 6 MONTHS

Product Code: SPOW

200 micron White Monomeric PVC — Matte

(Eco)Solvent
Latex
UV

DOT Pattern
Polyacrylate
Adhesive

Widths up to 1370mm

6 MONTHS DURABILITY — **INTERIOR**

APPLICATIONS

APPLIED TO FLOOR,

CERAMIC TILES,

SEALED WOOD,

CONCRETE, WAXED VINYL,

SHORT PILE CARPETS

Certified for **HP Latex Inks**

2018 Product of the Year SGIA Media — Adhesive Back Vinyl

DRYTAC®
ADHESIVE SCIENCE

SpotOn®

FLOOR 200

TECHNICAL SPECIFICATION

SpotOn® Floor 200 is a 200µ (8 mil) embossed printable white matte monomeric PVC film, coated on one side with a dot-pattern, removable pressure sensitive polyacrylate adhesive. The adhesive is protected by a single sided, siliconised clay coated kraft release liner. This high quality ink receptive embossed white vinyl was specifically developed for easy application. SpotOn® Floor 200 has a post-printed anti-slip rating of R10, according to DIN 51130:2010, which allows for vibrant, slip resistant floor graphics without the need for lamination.

- IDEAL FOR SHORT TERM INDOOR FLOOR GRAPHIC PROMOTIONS
- EASY TOOL & BUBBLE FREE APPLICATION
- CAN BE REMOVED EASILY WITHIN 6 MONTHS

INSTALLATION RECOMMENDATION

Please see SpotOn® installation instructions for further details. The surface must be clean and smooth and free of defects before application.

PRODUCT STRUCTURE

Film	White Matte Monomeric PVC
Adhesive	Dot-Pattern Removable Polyacrylate
Release Liner	135 gsm Siliconised 1 Side Bleached Clay Coated Kraft

PRODUCT CHARACTERISTIC

Film Thickness	8 mil (200µ)	8.6 mil (215µ)
Adhesive Layer	0.6 mil (15µ)	
Outdoor Durability	Internal Use Only	
Application Temperature	>41˚F (5˚C)	
Service Temperature Range	-4˚F to 149˚F (-20˚C to 65˚C)	
Slip Rating	R10 (According to DIN 51130:2010)	
Fire Rating (DIN 4102-1)	B1 Rating	
Shelf Life	2 years	
Storage Conditions	64˚F to 77˚F (18˚C to 25˚C); 40 - 65% Relative Humidity	

PRINTING RECOMMENDATIONS
UV and Latex inks offer the greatest durability for floor applications. Due to the variance of solvent inks it is recommended scuff resistance is tested prior to installation.

DRYTAC®
ADHESIVE SCIENCE

Europe
Filwood Road,
Fishponds,
Bristol, BS16 3RY,
United Kingdom
bristol@drytac.com
Tel: +44 (0) 117 958 6500

Canada
105 Nuggett Court,
Brampton,
Ontario, L6T 5A9,
Canada
toronto@drytac.com
Tel: +1 800.353.2883

USA
5601 Eastport Boulevard,
Richmond,
Virginia, 23231,
USA
customerservice@drytac.com
Tel: +1 800.280.6013